


5G モジュール Module



5G SRM815 Module

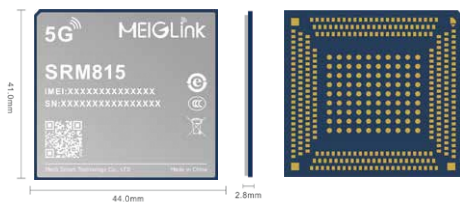

5G SRM825W Module

5G NR Sub-6GH モジュール (LGA)

CE/FCC/PTCRB/SRRC グローバル周波数 GPS/GLONASS/BeiDou 豊富なインターフェース

Chipset	Qualcomm SDX55	
Package	392-Pin LGA 44*41*2.8mm	
Bands	Support 5G NR Sub 6G Support SA and NSA mode SRM815-EA : Region : EMEA, China, Korea, Australia 5G NR Sub-6G : N28/N41/N77/N78/N79; LTE-FDD : B1/B3/B5/B7/B8/B18/B19/B20/B28/B32 LTE-TDD : B34/B38/B39/B40/B41/B42 WCDMA : B1/B5/B8 SRM815-NA : Region : North America 5G NR Sub-6G : N2/N5/N12/N25/N41/N48/N66/N71/N78 LTE-FDD : B2/B4/B5/B12/B13/B14/B25/B26/B28/B29/B30/B66/B71 LTE-TDD : B41/B42/B43/B48 WCDMA : B2/B4/B5	
GNSS	GPS/GLONASS/BeiDou/Galileo/QZSS	
Antenna	LTE/NR Antenna * 8, GNSS Antenna * 1	
Hardware	Power	3.3V~4.35V, Typ. 3.8V
	Interface	PCM/UART/SIM/I2C/RGMII/SDIO/ADC/Reset Power/LED_MODE/LED_STATUS/GPIOs/USB3.1 PCIe3.0
Software	Functions	TTS, Voice, SMS, TCP/IP, SSL, FTP, Sleep
	Update	Firmware update via USB, FOTA
	Driver	Linux/Android/Windows 7 above
Working Temp.	-40~+85°C	

5G NR Sub-6GHz & mmWave モジュール (M.2)

CE/FCC/PTCRB/SRRC グローバル周波数 GPS/GLONASS/BeiDou 豊富なインターフェース

Chipset	Qualcomm SDX55	
Package	M.2 Form Factor 52*30*3.6mm	
Bands	-KR : Region : Korea 5G NR : N78/N79/N257 LTE-FDD : B1/B3/B5/B7/B8/B28 WCDMA : B1 -NA : Region : North America, South America 5G NR : N2/N5/N12/N25/N41/N48/N66/N71/N77/N78/N258/N260/N261 LTE-FDD : B2/B4/B5/B7/B12/B13/B14/B17/B25/B26/B29/B30/B66/B71 LTE-TDD : B41/B42/B43/B46/B48 WCDMA : B2/B4/B5 -EA : Region : Europe, Australia, EMEA 5G NR Sub-6G : N1/N3/N28/N40/N41/N77/N78/N79/N257/N258 LTE-FDD : B1/B3/B5/B7/B8/B18/B19/B20/B28/B32 LTE-TDD : B34/B38/B39/B40/B41/B42 WCDMA : B1/B3/B5/B8	
GNSS	GPS/GLONASS/BeiDou/Galileo/QZSS	
Antenna	LTE/NR/GNSS Antenna * 5, Up to 4mm Wave Antennas	
Hardware	Power	3.3V~4.35V, Typ. 3.8V
	Interface	USB3.1, PCIe3.0
Software	Functions	TTS, Voice, SMS, TCP/IP, SSL, Http(s), FTP, Sleep
	Update	Firmware update via USB, FOTA
	Driver	Linux/Android/Windows 7 above
Working Temp.	-40~+85°C	